

Manual

Smart Radon Sensor

Radon monitor for building automation

Version April 2025

Referenced documents

[Software manual Radon Vision 8](#)

Software manual SARAD Registration Server

[Manual Aranea](#)

[Application Note 009: MODBUS RTU](#)

SARAD GmbH

Wiesbadener Straße 10

01159 Dresden

Germany

sarad.de

info@sarad.de





Table of Contents

INTRODUCTION /APPLICATION	4
THE INSTRUMENT.....	4
Controls.....	4
Power supply	5
Main power supply	5
Back-up batteries	5
SETUP	6
Changing the batteries.....	6
Setup using Radon Vision software	7
Selection of the right location for exposure and installation	7
Selection of the right integration interval	8
OPERATION.....	8
Measurement	8
LED indicators	8
Maintenance.....	10
COMMUNICATION INTERFACES	10
RS-485	10
General.....	10
MODBUS RTU.....	10
Implemented functions.....	11
USB.....	12
Wi-Fi.....	12
General.....	12
Configuration	12
Analogue output	14
4...20 mA current loop	14
Alert switch.....	15
SUPPLEMENTARY EQUIPMENT	15
Pressure sensor.....	15
CO ₂ gas sensor	15

Continuous operation	15
Occasional operation	16
DISPOSAL INSTRUCTIONS	16
TECHNICAL DATA.....	17
Smart Radon Sensor	17
Wireless switch	19

Introduction /Application

The Smart Radon Sensor is an innovative radon monitor, designed for integration in building automatization systems. Thanks to the broad spectrum of interfaces one can integrate the sensor with relative small effort within an existing infrastructure. The high sensitivity allows for quick and precise determination of radon value, so the device is suitable for controlling the ventilation systems.

The Smart Radon Sensor is used for long-term monitoring of the legal reference value for the radon concentration in breathing air. The device was specially designed for homeowners as well as tenants, lessors and housing companies.

The Smart Radon Sensor records the transient behaviour of the radon concentration over many years reliably, meaning that influences on weather conditions and seasonal changes are safely recorded. Sensors for temperature and humidity provide information about a healthy indoor climate. The measurement data can be read out at any time for preservation of evidence.

The device should also be used to monitor the success of radon remediation measures.

The instrument

Controls

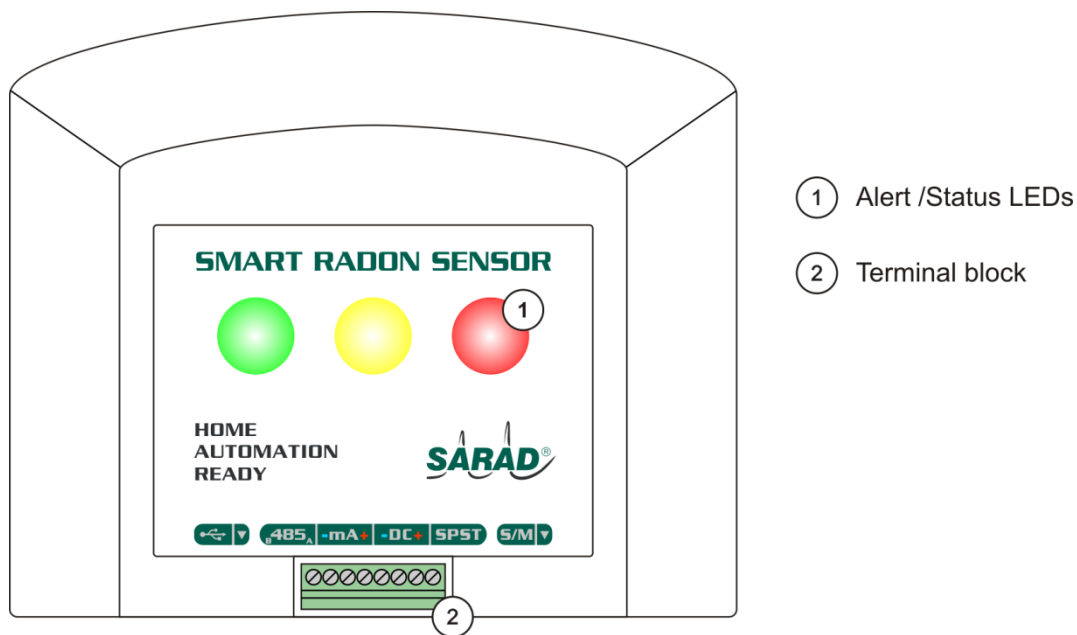


Figure 1 Front panel controls

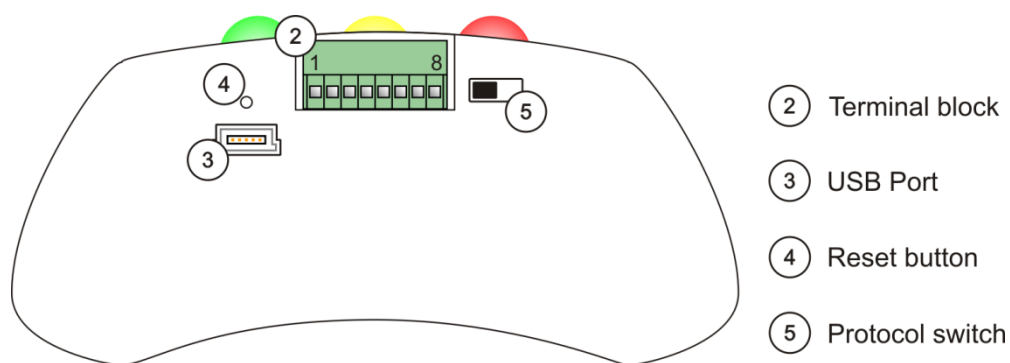


Figure 2 Bottom panel controls

Table 1 Ports of the screw terminal block

1	RS-485, B (D-)
2	RS-485, A (D+)
3	4...20 mA current loop, - (GND)
4	4...20 mA current loop, + (I_{OUT})
5	Main power supply, - (GND)
6	Main power supply, + (+12...+24 V)
7	Switch output, SPST 1
8	Switch output, SPST 2

Power supply

Main power supply

The Smart Radon Sensor requires an external power supply in the range of 12 V to 24 V. The maximal current consumption does not exceed 50 mA (including 20 mA of current loop's maximal signal and active LEDs, but without usage of the CO₂ sensor).

The connection ports for the power supply are shown in Figure 1 and defined in Table 1 (ports 5 and 6 of the screw terminal block). It is recommended to use a power supply unit with a galvanic isolation for supplying the Smart Radon Sensor. The galvanic isolation is of importance in case the analogue output is utilized and the 0...20 mA inputs of the data log system are referenced to the ground potential (e.g. the current signal is transformed into the voltage value through a defined resistor).

Back-up batteries

The device is equipped with an internal back-up power supply (UPS) consisting of two LR03 (AAA) batteries. This feature allows one to continue the measurement seamlessly if main power supply failure occurs.

Without DC connection the backup will supply the device for approximately two weeks. In such circumstances the current loop as well as (if present) CO₂ sensor will be deactivated, and the LEDs functionality will be reduced. If the cell voltage drops below 1.0 V, then the current measurement will be interrupted and the instrument enters the standby mode. Once the main powers supply recovers or new batteries are placed, the stored measurement data will be accessible immediately.

The instrument accepts alkaline as well as NiCd or NiMH batteries.

Attention! Do not use lithium-ion batteries because their cell voltage is 3 V or 3.6 V.

Important: Rechargeable batteries will not be charged once placed in the instrument.

For maximum operational period we recommend the usage of alkaline batteries which are optimized for low loads. In contrary to rechargeable batteries, the alkaline batteries do not suffer from excessive self-discharge process and therefore are able to keep their initial electrical capacity for over 10 years.

Setup

Changing the batteries

For battery replacement, the rear cover has to be removed. To do that, both screws (A in Figure 3) at the backside must be unscrewed at first. After that, the cover can be detached by tilting as shown in Figure 4. Please, pay special attention to the correct polarity of the batteries when inserting them (Figure 5). Change both batteries at the same time because differing charging levels may lead to failures. Use always batteries of the same type.

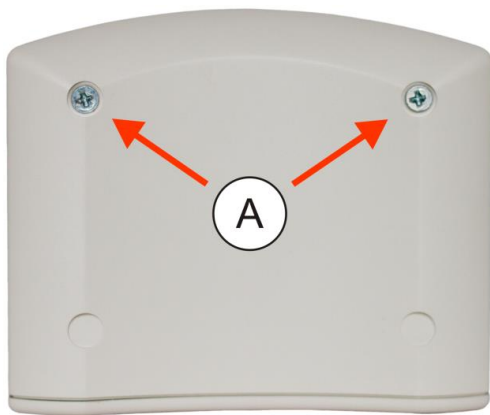


Figure 3 Remove both screws from the rear panel



Figure 4 Remove the rear cover. Tilt it at the round edge as shown.

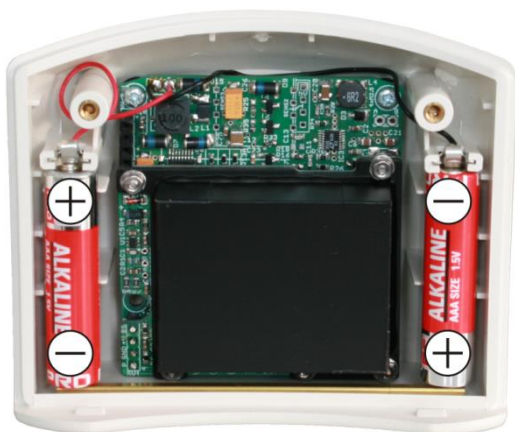


Figure 5 Insert LR03 (AAA) batteries left and right. Make sure to polarise as shown!

Important: Set the real time clock of the instrument by means of *Radon Vision* software after inserting the batteries (refer to the [Radon Vision 8 software manual](#))!

Setup using Radon Vision software

The SARAD Radon Vision application software is required to set up the Smart Radon Sensor with the following steps

- Set the real time clock,
- Set the sampling interval (integration interval),
- Set the alarm level (radon threshold),
- Set MODBUS or Wi-Fi parameters if required.

To do this, install the software according to the instructions in the *Radon Vision 8* software manual. Then connect your PC to the USB port (3 in Figure 2) of the measuring device. Follow the instructions of the software manual to set up the instrument.

Selection of the right location for exposure and installation

The instrument should be placed at a location which is representative for the indoor air quality of a room. The incidence of direct light and exposure to strong heat sources should be avoided. For permanent installation, the Smart Radon Sensor can be mounted on a wall using a wall mounting clip (accessory). Attention has to be paid because the wall itself could be the origin of the radon inside a room. This would result in an increased concentration in the surrounding of the surface. Some

comparison measurements at the preferred mounting position and in the middle of the room (each at least a few days under similar weather conditions) will show if this is the case or not.

When the mounting of the device is accomplished the terminal block can be wired.

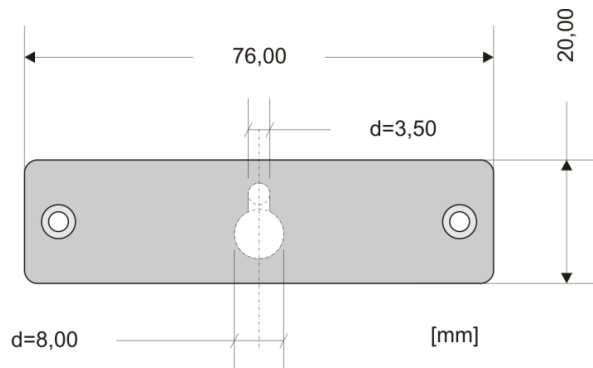


Figure 6 The wall mounting clip



Figure 7 Smart Radon Sensor with the mounting clip

Selection of the right integration interval

It is possible to adjust the sampling interval of the Smart Radon Sensor between 1 and 255 minutes. From the physical point of view, it makes no sense to choose intervals shorter than 30 minutes because the response time of the instrument is in that order. If the expected radon concentrations are in the range or less than the statutory reference level of 300 Bq/m^3 , an interval of 60 minutes (default setting) should be used. Frequent zero readings for individual sampling intervals indicate that the chosen interval is too short.

Operation







Measurement

The measurement starts automatically when the batteries are replaced or the main power supply is connected. The first measurement result is available as soon as the first sampling interval is completed. Newly acquired values are periodically appended to the previously stored results. The measurement cannot be stopped by the user.

LED indicators

Radon activity above alarm threshold value will be indicated by the three different colored LEDs at the front panel (Figure 1). Simultaneously the alert switch will be activated (refer to section Alert switch). Table 2 and Table 3 below sum up all possible LED signals.

Table 2 LED signals

	Permanent ON	$\text{radon} < 0.5 \times \text{alarm_level}^1$
	Permanent ON	$0.5 \times \text{alarm_level} \leq \text{radon} < \text{alarm_level}$
	Permanent ON	$\text{radon} \geq \text{alarm_level}$
	Blinks	USB connection or Wi-Fi module present
	Blinks	Internal sensor clock not set
	Blinks short	Power supply failure ²

Example: alarm_level = 300 Bq/m³.



The green LED will be active at radon concentration below 150 Bq/m³.

The yellow LED will be active at radon concentration between 150 Bq/m³ and 300 Bq/m³.

The red LED will be active at radon concentration above 300 Bq/m³.

In case the instrument additionally encloses CO₂ sensor the meaning of the LED signals changes as stated in Table 3. The meaning of all other signals stays unchanged.

Table 3 LED signals for Smart Radon Sensor with CO₂ sensor

	Permanent ON	$\text{radon} < \text{alarm_level}$ AND $\text{CO}_2 < 1000 \text{ ppm}$
	Permanent ON	$\text{CO}_2 \geq 1000 \text{ ppm}$

¹ Alarm level – Alarm threshold for radon

² The green and yellow LEDs are switched off. The analogue output is deactivated.

Maintenance

The battery condition should be checked once per year to prevent discharged batteries in the appliance from leaking. After disconnecting the main power supply, the battery voltage can be checked using the *Radon Vision* software. Older data in the memory that is no longer required can also be deleted using the software at this time.

Communication interfaces

For a communication between the Smart Radon Sensor and the data acquisition system two digital, wire interfaces are provided. The RS-485 standard serial interface allows user to integrate the instrument within corresponding network. The USB interface provides a quick way for sensors configuration and maintenance. Once the USB cable is attached to the device, the RS-485 interface will be automatically disabled. In such a situation only USB communication is possible. After removing the USB cable the RS-485 interface will be reactivated.

An integrated Wi-Fi Module can be chosen as an optional component for the Smart Radon Sensor. If the module is present and the jumper is placed on the PCB (top right in Figure 5), the RS-485 interface is disabled and communication is via the local Wi-Fi network. During the USB transfer the wireless connection is disabled.

RS-485

General

The communication over RS-485 interface can be realized with usage of two protocols: proprietary SARAD protocol or industrial standard MODBUS RTU. The MODBUS protocol supports only the transmission of the recent readings. For all other functions the SARAD standard protocol has to be used. The protocol frames are explained in detail by the document “SARAD MODBUS Protocol”. The complete MODBUS documentation can be found in the internet under “modbus.org”.

MODBUS RTU

To identify an instrument on the MODBUS line, it must be assigned a unique node address between 1 and 250. This bus address and the bus speed for MODBUS protocol can be programmed into the instrument using the software *Radon Vision* (since version 8.2.5).

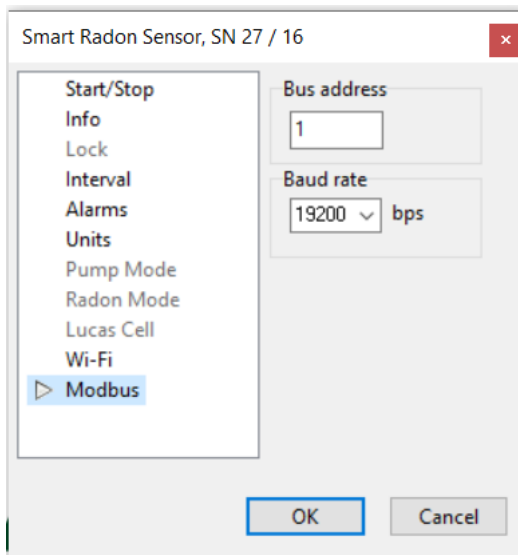


Figure 8 MODBUS configurations in *Radon Vision*

The parameters for the RS-485 interface are predefined by the firmware. The following versions are currently available:

- 1 start bit, 8 data bits, parity None, 2 stop bits (default)
- 1 start bit, 8 data bits, parity None, 1 stop bit
- 1 start bit, 8 data bits, parity Even, 1 stop bit

Selection of the required operating protocol for the RS-485 interface is made by means of the slide switch located on the bottom of the instrument (5 in Figure 2). In the “M” position, the instrument operates with the MODBUS protocol. The “S” position activates the SARAD protocol.

Implemented functions

Function code 0x03 (read holding register)

Valid register addresses are shown in Table 4.

Table 4 MODBUS RTU register addresses

Register address	Register content	Number of registers	Format
0x0000	Radon concentration [Bq/m ³]	2	Float
0x0002	Statistical error of radon concentration [%]	2	Float
0x0004	Average radon concentration since last start [Bq/m ³]	2	Float
0x0006	Battery voltage [V]	2	Float
0x0008	Temperature [°C]	2	Float
0x000A	Relative humidity [%]	2	Float
0x000C	Barometric pressure [mbar] / CO ₂ concentration [ppm]	2	Float

IEEE 754 float values (4 Byte, little-endian) are transmitted as two sequential 16 bit registers. The number of registers to be read must be two. That means, only one value can be transmitted per frame. Other values and not stated register addresses will cause an exception response.

USB

The additional USB standard communication interface (3 in Figure 2), allows you to download measurement data and set the operating parameters of the Smart Radon Sensor using the *Radon Vision* software.

During USB communication with the instrument the RS-485 port of the instrument is disabled. On the other hand, the analogue output (current loop) and the alarm switch are still available and active.

Warning: In case of the USB transmission only SARAD protocol will be supported independent from protocol switch (5 in Figure 2). After detaching the USB cable from the instrument the RS-485 interface will be reactivated with protocol selection according to the position of the slide switch.

The device cannot be powered via the USB port.

Wi-Fi

General

The Smart Radon Sensor can be equipped with an optional Wi-Fi module. The radio module can only operate if an external power supply is available. In order to establish the connection with the local wireless network, it is necessary to configure the Wi-Fi module by means of the USB and the *Radon Vision* software.

In addition to the above, there has to be a PC with the *SARAD Registration Server* service installed, or a device from the *Aranea* family, both with the appropriate configuration. This appliance will act as gateway to forward the connection to your Smart Radon Sensor to all other PCs in your LAN. With regard to the connection to this computer, the versions of the Wi-Fi module supplied before and after 2025 differ slightly, so the following section is subdivided according to these versions.

Further details can be found in the *Aranea* manual, in the software manual of *Radon Vision 8* and in the software manual of the *SARAD Registration Server* service.

Depending on the structure of the building between the Smart Radon Sensor and the Wi-Fi router, as well as the number of wireless devices transmitting in close proximity to the measurement device, there may be differences in the quality of the connection.

Configuration

Delivered before 2025

Configuration of the Gateway

There must be a specific computer in your local network (LAN) that has a fixed IP address known to you and acts as a gateway to provide the connection to your Smart Radon Sensor devices for all other PCs in the local network. Please follow the instructions in the *Radon Vision 8* manual to install the *SARAD Registration Server* service on this computer. Customize the configuration file (`config.toml`) of the *SARAD Registration Server* service in the following way:

- In section `[backends]` add `is1 = true`

Restart the service to make the new configuration active. The easiest way to do this is to restart the computer.

The gateway configured in this way must be running before the Smart Radon Sensor devices are switched on. There should be only one gateway in your LAN.

Configuration of the Smart Radon Sensor

Use the device setup in *Radon Vision 8* (Figure 9) to configure the Wi-Fi module of every sensor:

- **SSID** – Service Set Identifier for the WLAN network (typically available in the WLAN router)
- **Password** – Password for SSID
- **IP Address** – static IP address of the computer with *SARAD Registration Server* service.
- **Port** – Port for communication. Default set to: 50002

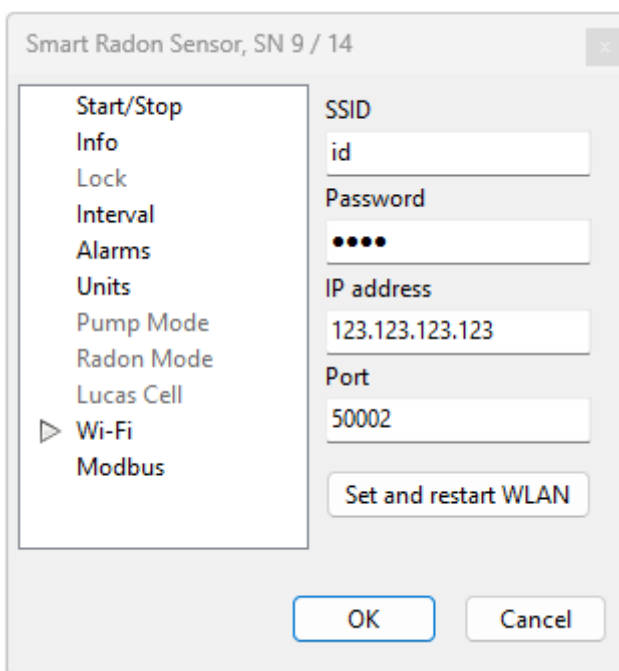


Figure 9 Wi-Fi configurations in *Radon Vision*

Once the parameters have been set, press the “Set and restart WLAN” button. If the configuration is successful, the device will appear in the *Radon Vision* software device list after a few seconds.

Delivered 2025 and later

Configuration of the Gateway

Please follow the instructions in the *Radon Vision 8* manual to install the *SARAD Registration Server* service and *Radon Vision 8* on your computer. Customize the configuration file (`config.toml`) of the *SARAD Registration Server* service in the following way:

- In section `[backends]` add `is1 = true`
- Add section `[is1_backend]`
- In section `[is1_backend]` add a list of hosts according to the following example:
`hosts = ["ESP-0A5767", "SRS-00123", "SRS-00124"]`
 The host name is usually identical to the serial number on the type plate of the device.

Restart the service to make the new configuration active.

It is sufficient to configure one PC within your LAN in this way. As long as this PC is running, it will provide the connection to the Wi-Fi devices for all other PCs in your LAN.

Configuration of the Smart Radon Sensor

Use the device setup in *Radon Vision 8* (Figure 9) to configure the Wi-Fi module of every sensor:

- **SSID** – Service Set Identifier for the WLAN network (typically available in the WLAN router)
- **Password** – Password for SSID
- **IP Address** – not required
- **Port** – not required

Once the parameters have been set, press the “Set and restart WLAN” button. If the configuration is successful, the device will appear in the *Radon Vision* software device list after a few seconds.

Analogue output

4...20 mA current loop

The Smart Radon Sensor provides an analogue output with current signal between 4 and 20 mA (so-called Current Loop). This feature offers a reliable way for transmitting the measurement signal over long distances. The terminal ports for the current loop are designated in Table 1.

At the end of each integration interval, current value will be calculated according to the radon activity and the chosen measurement range. The output signal therefore will be updated periodically.

From the beginning of the measurement till the end of the first measurement interval the output current value equals 4 mA.

The maximal current value of 20 mA corresponds to the value of ten times the radon alarm threshold. In the case of threshold value of 300 Bq/m³ (default setting) the 20 mA output current represents the radon value of 3000 Bq/m³. For radon activity below detection limit the 4mA current value will be held. The output signal of the current loop is realized with 12 bit digital/analog converter. As a result the resolution of the output signal is equal to 0.0039 mA.

Example:

The current output value will be set according to a following calculation with a radon threshold of 300 Bq/m³ and the radon measurement equal to 1125 Bq/m³:

$$I_{\text{OUT}} = \frac{1125 \text{ Bq/m}^3 \times (20 \text{ mA} - 4 \text{ mA})}{10 \times 300 \text{ Bq/m}^3 + 4 \text{ mA}} = 10 \text{ mA}$$

The 20 mA output signal will be present for all measurement results above radon range defined for the current loop (10 × radon alarm threshold). The relationship between radon alarm threshold and the output range of the analogue signal allows for easy adjustment to the input range of the data acquisition system.

Warning: If the Smart Radon Sensor is being integrated in existing network or measurement system, first an apparent resistance has to be considered. The entire apparent ohmic resistance ought not to be greater than 475 Ohm for 12 V supply voltage. For 24 V supply voltage the apparent resistance must not exceed 1075 Ohm.

Alert switch

The Smart Radon Sensor is equipped with a switch output which can be used for ventilation control or alert indication. The potential-free contacts of the switch will be short-circuited at the end of the sampling interval if the measured radon concentration exceeds the alarm threshold. The output will be deactivated one minute before the subsequent interval ends. Therefore, the sampling interval must be set at least to two minutes. The alarm threshold is factory-set to 300 Bq/m³ (statutory reference value of the Radiation Protection Act) and may be changed by the user with respect to local regulations (instrument setup in *Radon Vision*).

Warning: at the same time the alarm threshold defines the radon range for the maximal output signal of the current loop. Please refer to section Analogue output above.

The terminal ports for the alert switch are designated in Table 1.

As an accessory, we offer a wireless power switch which can be used for direct ventilation control. The switch includes a transmitter unit to be connected to the alert switch output of the instrument, and a plug adaptor (receiver) which can be placed between the wall outlet and the power cable of the ventilation unit. Optionally, a flush-mounting power switch is also available. The plug adaptor offers an additional timer function to define the duration of the ventilation period independent from the sampling interval of the instrument (for example 15 minutes ventilation while the sampling interval is 60 minutes long). The wireless switch is coded. That means, several transmission lines can be established within one building. The assignment between transmitter and receiver is easily done by a push button.

The sampling interval should be set to a value between 60 or 120 minutes for an alarm threshold lower than 300 Bq/m³.

Supplementary equipment

According to the needs of the customer the Smart Radon Sensor can be equipped with additional sensors for example: pressure or CO₂ sensor.

Pressure sensor

The barometric pressure can be measured in a range between 800 hPa and 1200 hPa. The sensor unit is fully calibrated and features temperature compensation.

CO₂ gas sensor

The integrated CO₂ sensor uses the non-dispersive infrared (NDIR) operational principle. This requires an infrared source which cannot be supplied by the internal batteries due to the increased power consumption. Therefore, the CO₂ sensor will only work if the external power supply is connected.

Continuous operation

The automatic calibration procedure of the sensor uses the CO₂ concentration of fresh air (400 ppm) as reference. The instrument must be exposed to this fresh air concentration at least once during the last 24 hours. This can be achieved by short ventilation of the room. If there are no persons inside a room for a while (for example overnight), the concentration goes back to 400 ppm.

Attention! If the reference concentration cannot be reached within the past 24 hours, the sensor interprets the lowest measured result as 400 ppm. This results in a systematically increasing measurement error.

If the CO₂ concentration exceeds the recommended threshold of 1000 ppm, the yellow LED turns on. It will turn off as soon as the concentration drops below 1000 ppm.

Occasional operation

If the CO₂ sensor is used for sampling periods less than 24 hours no calibration procedure as described above is carried out. Therefore it is recommended to operate the sensor at least once per week for a period longer than 24 hours to force a calibration. Of course, the instrument must be exposed to the fresh air concentration of 400 ppm during that time.

Disposal instructions

Batteries and accumulators must not be disposed of in the garbage, but you are legally obligated to return them to the appropriate waste collection centers. The measuring instruments must be disposed of in the electronic waste or handed to the manufacturer at the end of their service life for proper disposal. If necessary, they have to be decontaminated before.

Technical data

Smart Radon Sensor

Radon measurement

Operational principal	Lucas cell with gross alpha counting	
Sampling method	Diffusion	
Accuracy	≤ 6 %	
Sensitivity	3.7 cpm/(kBq/m ³)	
Range	1 ... 1 000 000 Bq/m ³	
Uncertainty (1σ)	1 h @ 300 Bq/m ³	15 %
	1 d @ 300 Bq/m ³	3 %
	1 d @ 50 Bq/m ³	8 %
Ambient conditions	-10 °C ... 50 °C, 0 %rF ... 100 %rF non-condensing	

Humidity measurement

Range	0 %rH ... 100 %rH
Accuracy	< 4.5 %rH (3 % typ.) for 20 %rH ... 80 %rH

Temperature measurement

Range	-40 °C ... 120 °C
Accuracy	< 0.4 °C (0.3 °C typ.) for 5 °C ... 60 °C

Pressure measurement³

Range	760 hPa ... 1200 hPa
Accuracy	< 0.5 % FSO

CO₂ sensor³

Principle of operation	Non-dispersive infrared (NDIR)
Range	400 ppm ... 5000 ppm
Accuracy	< 5 % ± 50 ppm
Response time	10 min
Remark	Automatic calibration with respect to outdoor CO ₂ level

Device

Power supply	12 to 24 V _{DC} at max. 50 mA current consumption
Back-up power supply	2 LR03 (AAA) batteries
Switch output	Optical relay with potential-free contacts; max. switch current

	0.2 A; max. switch voltage 40 V; 2 pin contact
Memory	16383 data records (approx. 2 years at 60 min interval) Measurement interval settable between 1 and 255 min
Interface	RS-485 (MODBUS RTU and SARAD protocol) 4 ... 20 mA analogous output (range configurable) Alert switch (potential free contacts) All interfaces with screw terminals
Wi-Fi ³	Wi-Fi protocols 802.11 b/g/n Frequency range 2.4 GHz ... 2.5 GHz Security WPA/WPA2
Alert indicators	Red, yellow and green LED indicators for alert and state of operation
Controls	Automatic start on power up
Application software	Radon Vision 8
Dimensions	96 mm × 82 mm × 44 mm
Weight	approx. 150 g including batteries
Accessories included	Bracket for wall mounting USB data cable Batteries type LR03 (AAA) User manual & software on CD-ROM Calibration with certificate (DAkkS compliant)
Firmware versions	1 start bit, 8 data bits, parity None, 2 stop bits (default) 1 start bit, 8 data bits, parity None, 1 stop bit 1 start bit, 8 data bits, parity Even, 1 stop bit 1 start bit, 8 data bits, parity Even, 1 stop bit
Internal options	Pressure sensor CO ₂ sensor Wi-Fi module
External options	Wireless switch Plug-in power supply Protective housing (IP 54)

³ Available as an option

Wireless switch

Device		
Transmitter	2 inputs	<i>E.g. additional input for manual switch</i>
Frequency	433 MHz	<i>With coding for safe transmission</i>
Range	ca. 30 m	
Power supply	Battery CR2032	<i>Good for 20,000 switching cycles</i>
Load switch (plug adapter)	220 V/50 Hz	<i>6 programmable groups (e.g. to connect more than one radon monitors)</i>
Max. switching load	3500 VA	
Adjustable timer	7 s, 5 min, 30 min, 1 h, 2 h, 4 h, 8 h	<i>If the timer function is not used, the power switch follows the state of the switch contact at the instrument</i>